

SECULUX LED




SPECIFICATION

General technical data	
Type:	SECULUX LED
Part No.:	15861, 16104 (in blister pack)
Approval:	EC Type Approval ('Wheelmark') SOLAS MED US Coast Guard (pending)
Light intensity:	0,75 candela
Working time:	more than 8 hours of full light intensity
Power source:	Alkaline
Dimension of battery:	60,5 x 35,5 x 16 mm, 66 g
Diameter of lightbase:	38 mm
Wire length:	approx. 75 cm
Lifetime:	5 years from date of manufacture
Characteristics: <ul style="list-style-type: none"> - Applicable for life jackets and Marker buoys - flashlight (50-70 flashes per minute) - applicable for fresh or salt water - automatic activation upon immersion in water - light can be switched off 	

Equipment



Clip for mounting on a belt

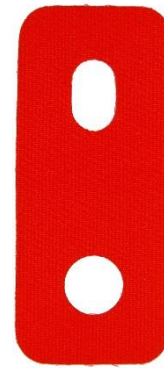

Strap for mounting to an oral valve

09/2016



CE-Wheelmark: PPE in conformance with MED/Marine Equipment Directive 96/98/EG and approved to SOLAS/IMO regulations for marine rescue equipment.



SECUMAR is a member of the Emergency Sea Rescue Equipment Trade Federation (FSR), a union of suppliers and importers of all water rescue equipment. For further information, see www.fsr.de.

